


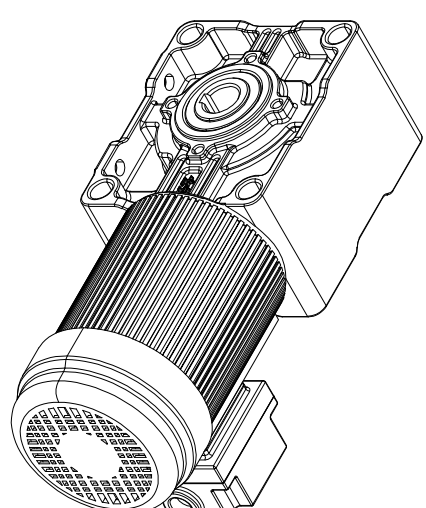
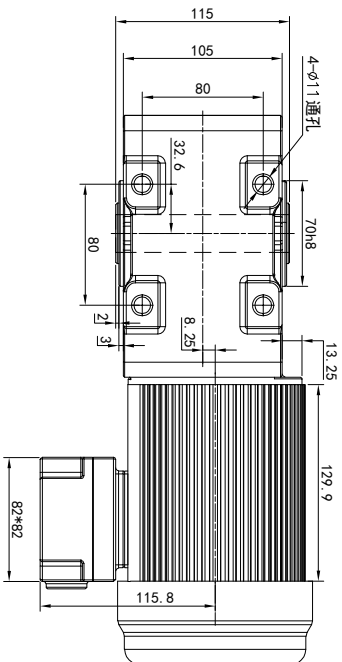


型号:SRH25-200-(i)-S-G2



輸出軸
細節A 比例2:1

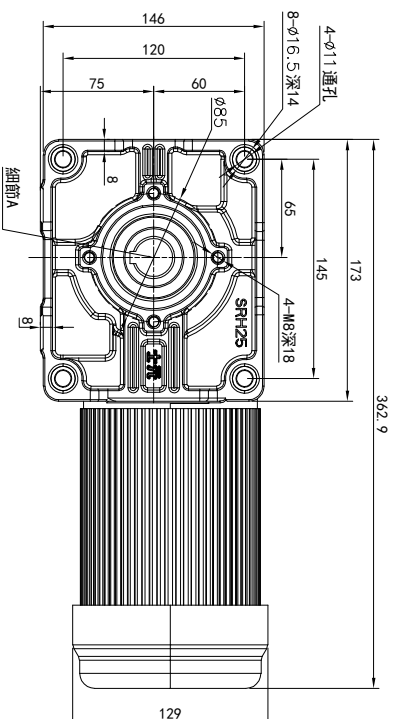

****按线注意事项****


1. 若电机接变频器使用, 接线盒内两根黄线须接独立电源, 不可使用变频器供电。
2. 注意整流器上所标注输入电压。

技术要求:


- 1、外观：表面喷塑处理
2、颜色：浅灰色
3、产品出厂，符合公司出厂检验标准
特殊要求描述：

三相220V接线				三相380V接线				输出转矩允许值				输出转矩的N、L			
额定功率				0.2kW				减速比				减速比 i			
防护等级				IP44				工作制				SI			
绝缘等级				F				相数				3			
额定电压				220V				级数				4			
频率				50 / 60				380V							
额定电流				1.2 / 1.1				50 / 60				0.7 / 0.63			
额定转速				1420 / 1720				1420 / 1720							
适用场地								室内							
环境温度								-10° C~40° C							
相对湿度								<90%							
使用环境								无粉尘、无盐、无腐蚀性气体、及其他对电机有危害的物质							
减速比 i															
N、m				kg·f·m				N				kg·f			
1:5				/				1300				/			
1:10				11				1520				155			
1:15				17				1720				175			
1:20				23				1860				190			
1:25				27				2010				205			
1:30				33				2110				215			
1:40				44				2300				235			
1:50				55				2450				250			
1:60				67				2550				260			
1:80				84				2650				260			
1:100				105				2650				260			
1:120				105				2650				260			
1:160				105				2650				260			
1:200				105				2650				260			
1:240				105				2650				260			

接线盒方向与入线口方向

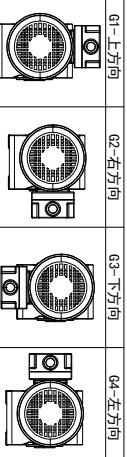

安装方位图

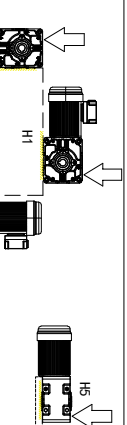

标记	处数	分区	更改文件号	签名	年月日



CHEETAH
www.cmgmotor.com

广东川铭精工科技有限公司

SRH直交轴减速机

 **CHEETAH**
www.cmgmotor.com

广东川铭精工科技有限公司

The diagram shows a parking lot layout with six vehicles labeled H1 through H6. H1 and H2 are positioned at the top right, facing left. H3 and H4 are in the center, facing right. H5 and H6 are at the bottom left, facing right. Arrows indicate movement paths: from H1 to H2, from H2 to H3, from H3 to H4, from H4 to H5, and from H5 to H6.

设计	W. W. B	2023/12/08	标准化	
校对			版本	V1.0
审核				
工艺			批准	

选型技术号	视图方式			重量	比例	SRH25-200-S
			11KG	1:5	A4	
共 1 张 第 1 张						