


180W/200W/250W																转矩单位换算：(kg·f·cm×9.8÷100)=N.m (牛顿·米)							
速比 i	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速 rpm (50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速 rpm (60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩 kg·f·cm	25.2	54.6	81	108.7	124.3	150	181.5	210.6	248	300	324	360	430	520	520	520	520	520	520	520	520	520	520

型号：6IK180 (200/250) GN-A (C/Y) +6GN3-200K

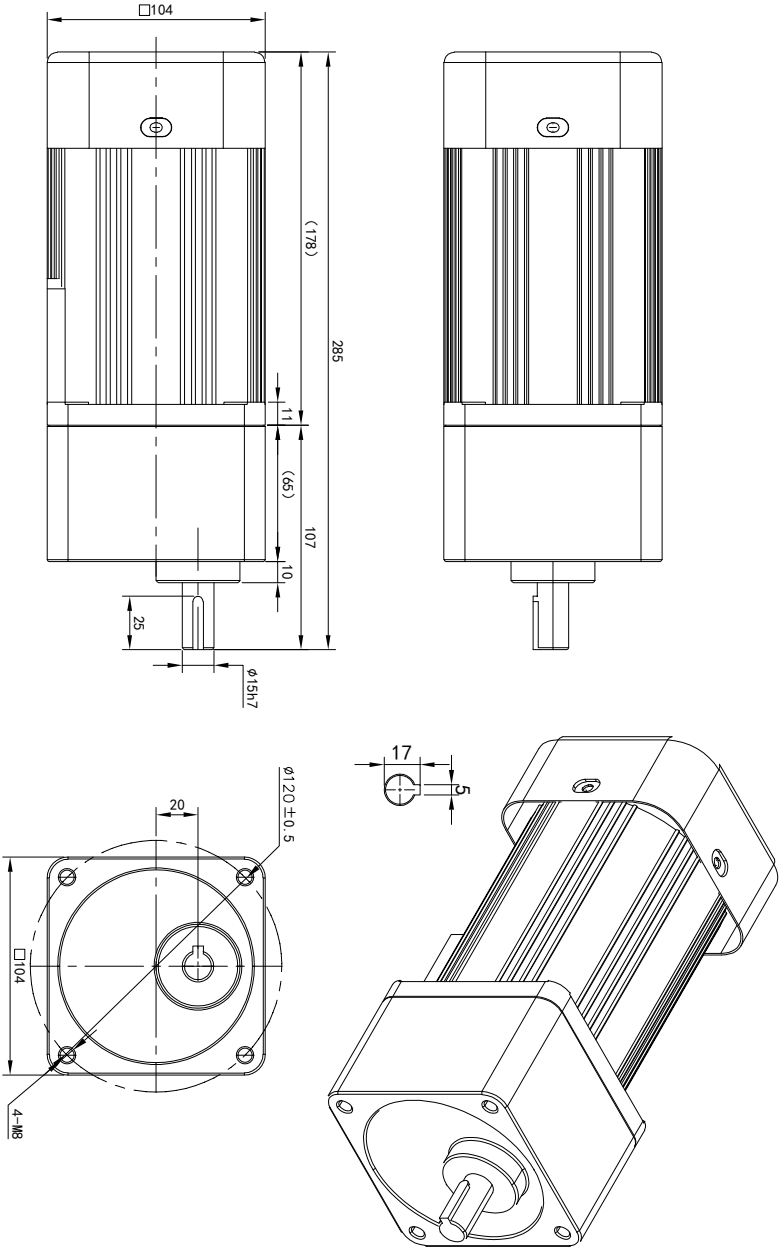

电机参数

功率：180W-250W

电机额定扭矩：

5. 5-13kg. cm (180W)

5. 5-14. 1kg. cm (200W)

5. 5-17kg. cm (250W)

电压：单相110/220V 4P

三相220V/380V 4P

频率：50Hz – 60Hz

减速机参数

减速比：参阅上方表格

转速：参阅上方表格

扭矩：参阅上方表格

请签字 (章) 盖章
日期

备注/附件登记																							
旧版图号																							
版图总号																							
签字																							
日期																							
单相马达接线图												三相马达接线图											
设计												Z X Y											
校对												U V W											
审核												U V W											
工艺												U V W											
标记												Z X Y											
处数												U V W											
分区												U V W											
更改文件号												U V W											
标准												U V W											
版本												U V W											
V1.0												U V W											
年月日												U V W											
公众号												U V W											
选型技术号												U V W											
视图方式												U V W											
重量												U V W											
比例												U V W											
共 1 张 第 1 张												U V W											
A4												U V W											
6IK180 (200/250) GN-A (C/Y) +6GN3-200K												U V W											

广东川铭精工科技
有限公司

微型感应减速机