


Technical drawing of the input end (Input) of a mechanical component. The drawing shows a square flange with a central circular hub. The outer square has a width of 180 mm. The central hub has a diameter of 200 mm. The flange has 12 mounting holes, 4 of which are M12x28. The flange has a thickness of 230 mm. The drawing includes a 45-degree chamfer on the outer corners.



容许径向力F _{2rB} ²	9400 N	传动效率	≈92%	重量 ≈17.5Kg 扭转刚性 50 Nm/arcmin 请注意: 1.所有数据(PDF.CAD.3D)变更时,我们不做通知。 2.具体速比的额定扭矩请参考我司样本“减速机性能资料”; “用户的实际负载扭矩”×“使用系数”≤减速机的额定扭矩, 否则用户发生故障。
容许轴向力F _{2aB} ²	4000 N	噪音值	≤65dB	
容许轴向力F _{2aZB} ²	4700 N	使用温度	-10℃~+90℃	
额定输入转速	3000 rpm	润滑方式	合成润滑油(终身润滑)	
最大输入转速	6000 rpm	安装方向	任意	
超精密背隙P0	—	防护等级	IP65	
精密背隙P1	—	使用寿命	20000h (连续运转减半)	
标准背隙P2	≤10 arcmin	入力法兰: TD110-φ114.3×61×M12		

标记	处数	分区	更改文件号	签名	年月日	
设计			标准化			
校对						
审核						
工艺			批准			

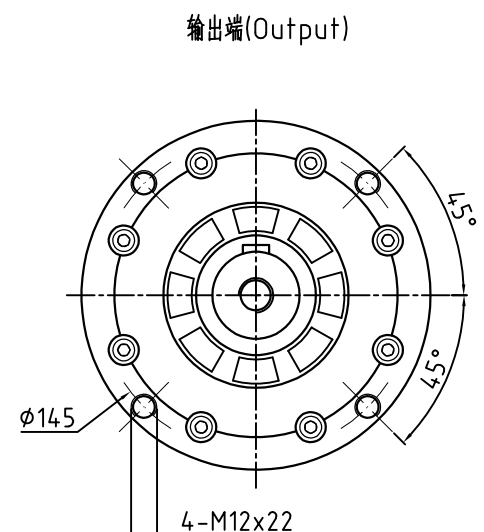

视图方式	重量	比例
------	----	----

 		
---	--	--

共 张 第 张

广东川铭精工科技
有限公司

精密行星齿轮减速机

TEG160-L2 (双级)