

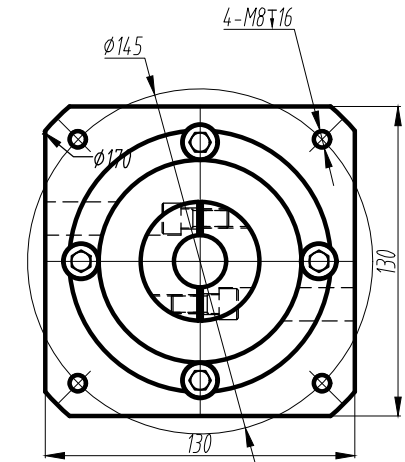


Technical drawing of a square flange with a central circular feature. The drawing shows a square flange with rounded corners, a central circular hole, and eight smaller circular holes arranged in a circle. Dimensions include a square symbol with 115, a dimension of 165, a dimension of 105, a dimension of 28, a dimension of 130, and a dimension of 4-Ø8.5.

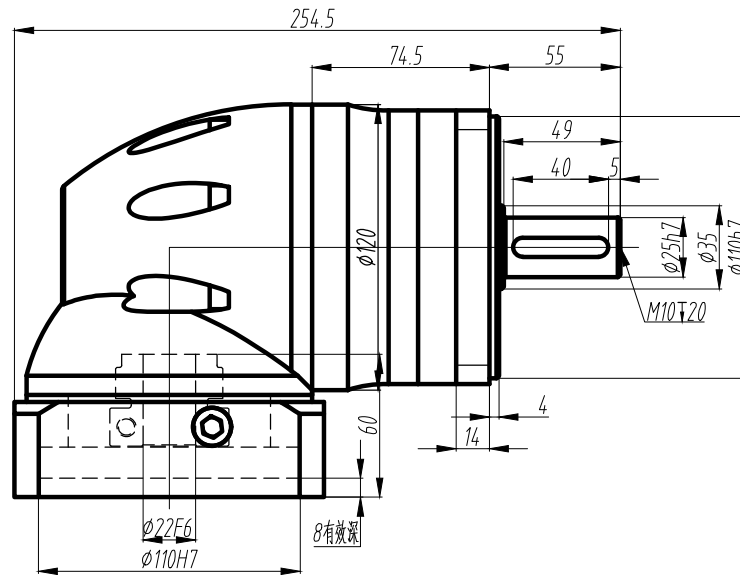

额定输出转矩 Nominal torque	-----Nm	最大输出转矩 Max.output torque	-----Nm
额定输入转速 Rated input speed	3000rpm	最大输入转速 Max.input speed	5000rpm
最大径向力 Max.radial force	2200N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
最大轴向力 Max.axial force	1600N	输出转速100rpm, 输出轴长1/2处为受力 Speed 100rpm,Axial length 1/2 stress	
满载效率 Maximum efficiency	90%	使用温度 Operating temp	-25°~ +90°
安装方式 Installation method	任意 arbitrarily	润滑方式 Lubrication mode	长效润滑 Permanent lubrication
重量 Weight	10.0 Kg	寿命 Average life span	20000h
防护等级 Protection level	IP65	法兰精度 Flange accuracy	DIN 42955—R
标准侧隙 Standard backlash	≤11arcmin	精密侧隙 Precise backlash	
输出键标准 Key standard	圆头普通平键 Round common flat key (A) GB1096—79		
齿轮精度等级 Gear precision grade	6 GB/T10095—2008		
电机功率 Motor power	1500W		
电机安装尺寸 Motor dimensions	ø22*55/ø110*5/4—ø9—ø145		



10	95.0
7	165.0
5	245.0
4	230.0
3	155.0
減速比(可選擇)	額定转矩(Nm)

減速比/可選擇/	額定转矩(Nm)
----------	----------



WWW.POROVIN.COM

TFR120-L1-S2-P2-P
(φ22-φ110-PCD145-M8)

设计			标准化		
----	--	--	-----	--	--

数量	重量	比例
----	----	----

数量	重量	比例

		1:1
--	--	-----

7

