
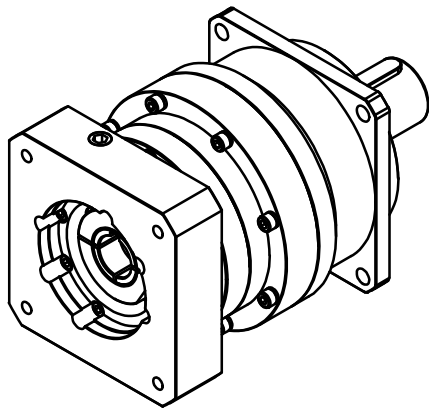


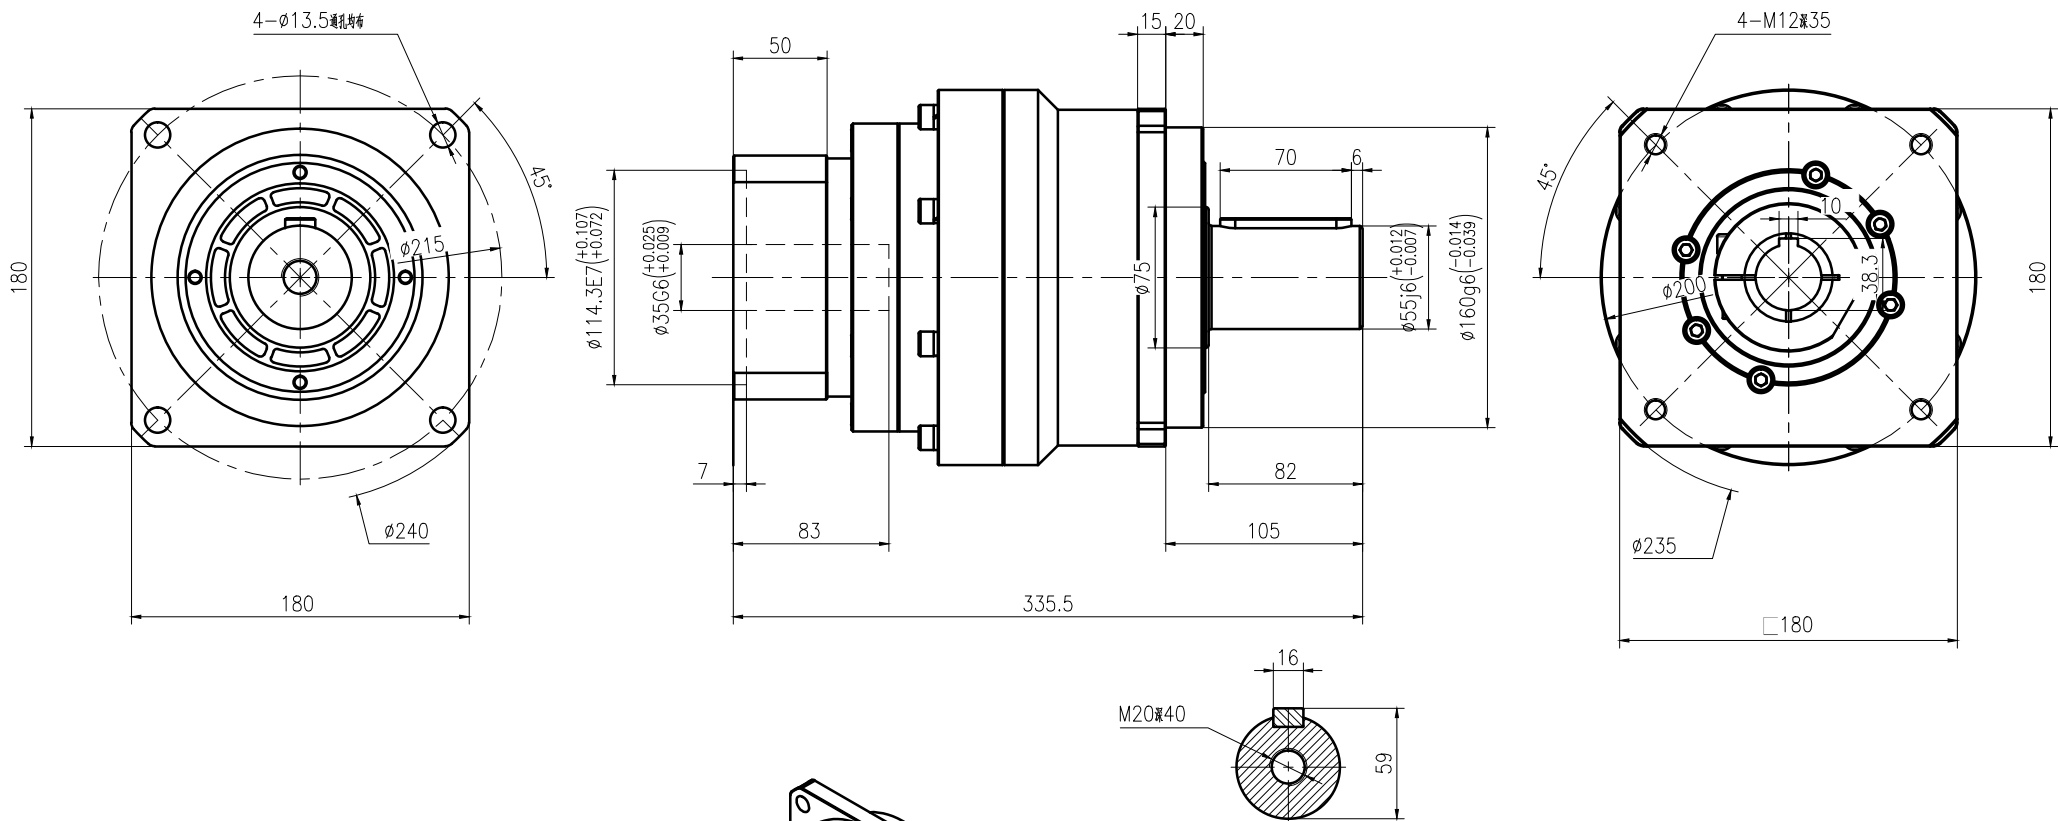

借通用件登记

描图

校描

旧底图总号

签字

日期

速比 <i>i</i>	12	16	20	25	30	35	40	50	70	100	扭转刚度C(Nm/Arcmin)	115					 WWW.POROVIN.COM	广东川铭精工科技 有限公司			
额定输出力矩T(Nm)	550	790	910	910	830	830	790	910	830	710	最大轴向力Fa(N)	5875									
紧急制动力矩T(Nm)	3倍额定输出力矩										最大径向力Fa(N)	10900	标记	数量	更改文件号	签字			日期		
额定输入转速 <i>n</i> (rpm)	3000										噪音L(DB)	≤67	设计			标准化				图 样 标 记	重 量
空载力矩T(Nm)	14	11	11	9	9	9	8	7	6.8	5	使用温度℃	-10~90	校 对							1:2	
回程间隙 <i>j</i> (Arcmin)	≤5										防护等级	IP65	审 核					工 艺		共 页	第 页