

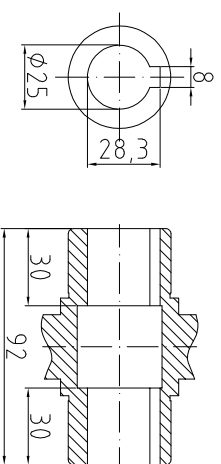
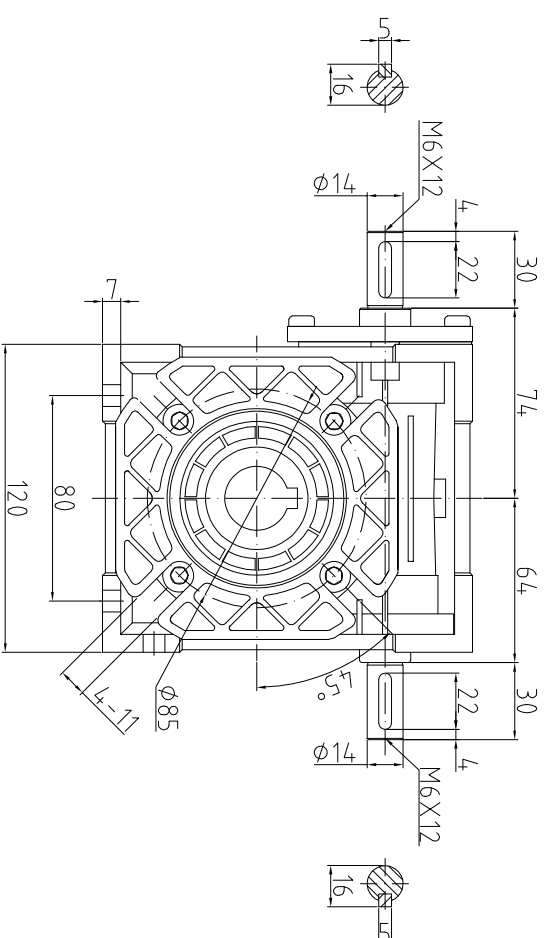


NRV-E050-(i)-F2-B3

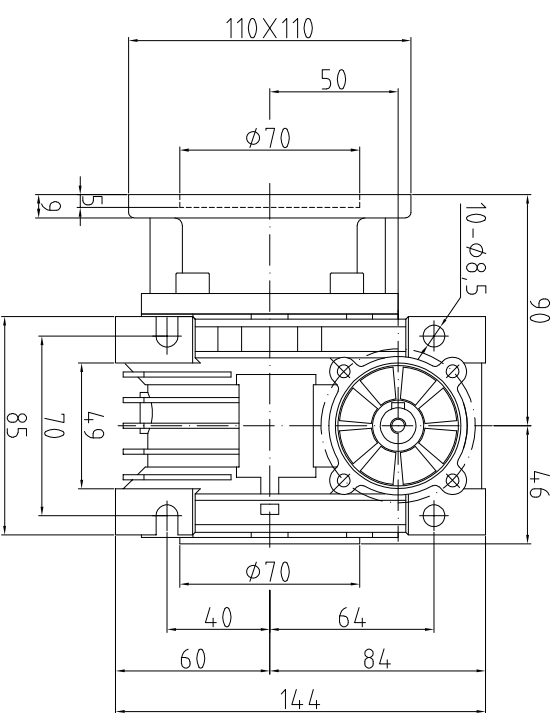

输出孔

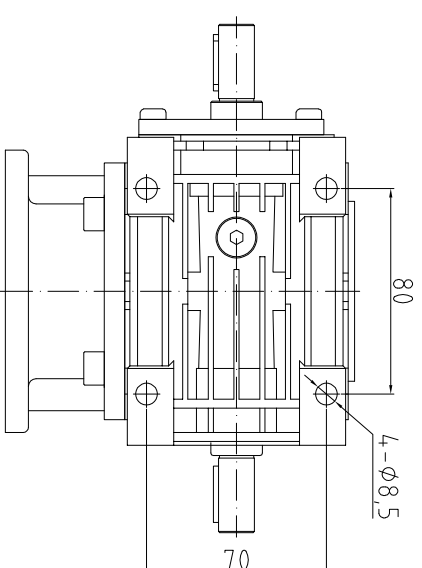

減速比(i)	5	7.5	10	15	20	25	30	40	50	60	80	100
額定輸出扭矩(N·m)	60	70	75	75	75	70	90	80	75	70	70	55
最大輸出扭矩(N·m)	120	140	150	150	150	140	180	160	150	140	140	110

广东川铭精工科技 有限公司										NMRV 蜗轮蜗杆减速机									
额定输入转速										1400 rpm									
最大输入转速										3000 rpm									
使用温度										-5℃~+40℃									
润滑方式										油润滑									
重量										≈4.3Kg									
安装方向										油孔视图									
B3																			
B6																			
安装方向										油孔视图									
B8																			
B7																			
V5																			
V6																			
标记										设计									
处数										分区									
更改文件号										标准									
签名										校对									
年月日										审核									
批准										工艺									
共 张 第 张										视图方式									
重量										比例									
www.cmgmotor.com										NMRV-E050									