

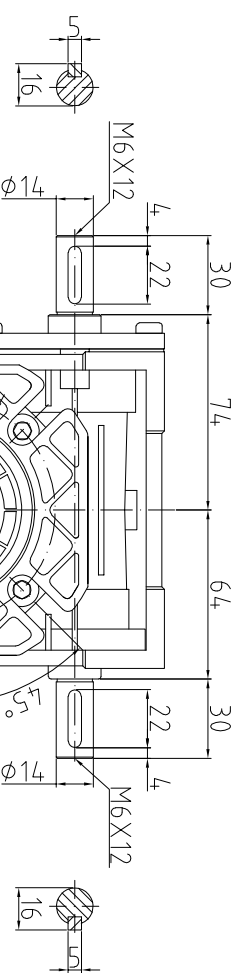
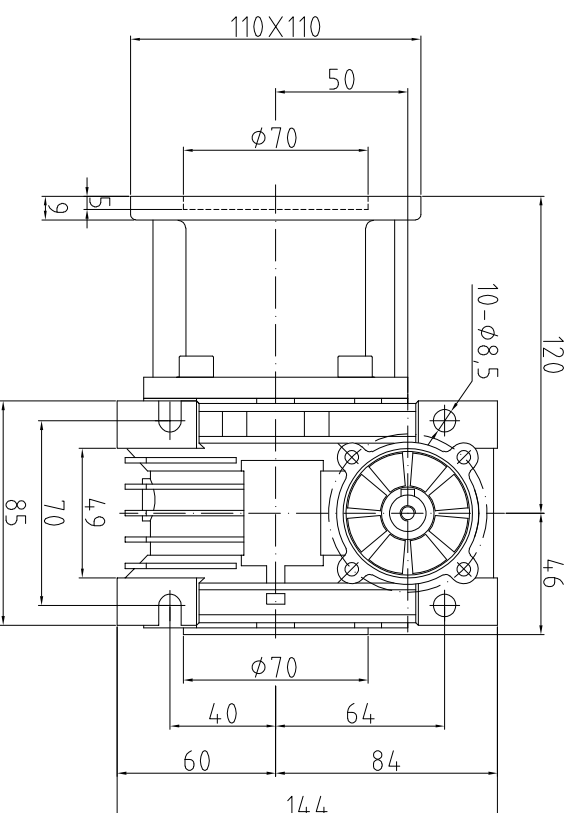
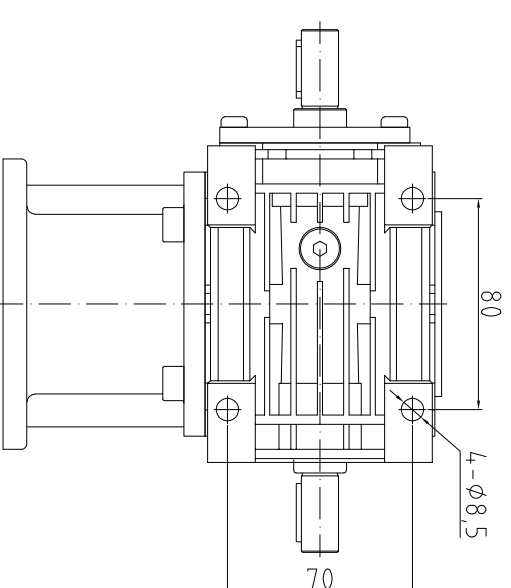


NRV-E050-(i)-FL2-B3

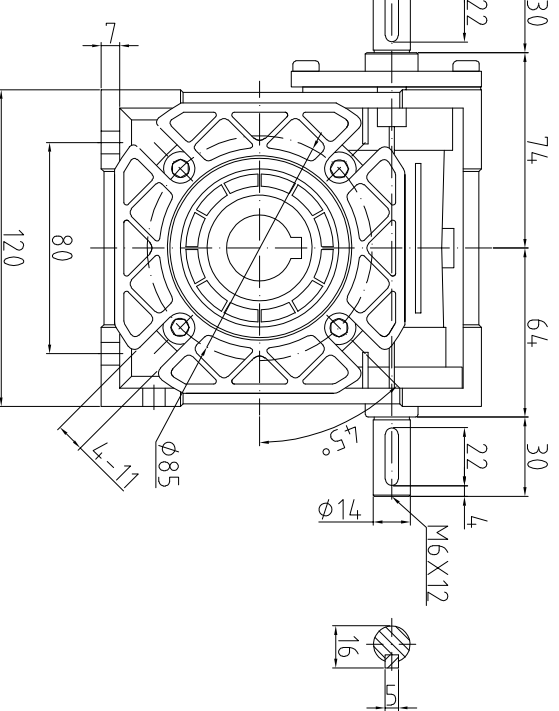

输出孔

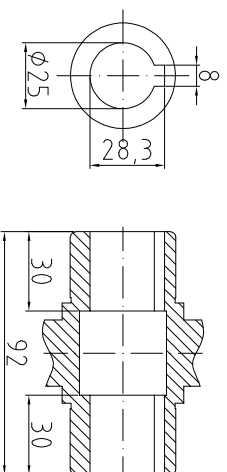

减速比(i)	5	7.5	10	15	20	25	30	40	50	60	80	100																			
额定输出扭矩(N·m)	60	70	75	75	75	70	90	80	75	70	70	55																			
最大输出扭矩(N·m)	120	140	150	150	150	140	180	160	150	140	140	110																			
额定输入转速	1400 rpm		安装方向		油孔视图		安装方向		油孔视图																						
最大输入转速	3000 rpm		B3				B8																								
使用温度	-5℃~+40℃		B6				B7																								
润滑方式	油润滑		V5				V6																								
重量	≈4.4Kg		请注意： 1.所有数据(PDF、CAD、3D)变更时，我们不做通知。 2.其他参数请参考我司样本手册。																												
CHESTNUTTING® www.cmgmotor.com 视图方式 重量 比例														设计		标记		处数	分区	更改文件号	签名	年月日									
														校对						标准化											
														审核																	
																												批准			
CHESTNUTTING® www.cmgmotor.com 视图方式 重量 比例														共		张	第	张													
														NRV-E050																	
广东川铭精工科技有限公司														NMRV蜗轮蜗杆减速机																	