



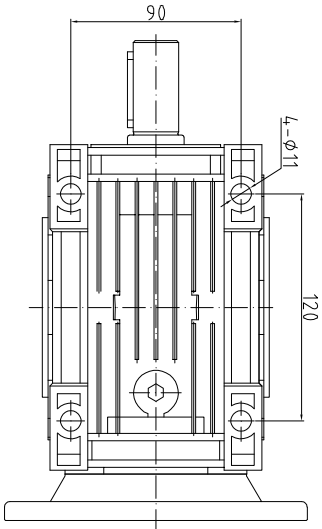
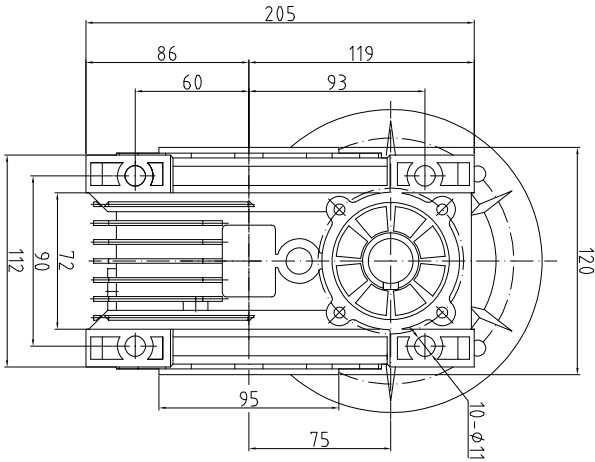


RV-E075-(I)-71B5-B3


输入孔

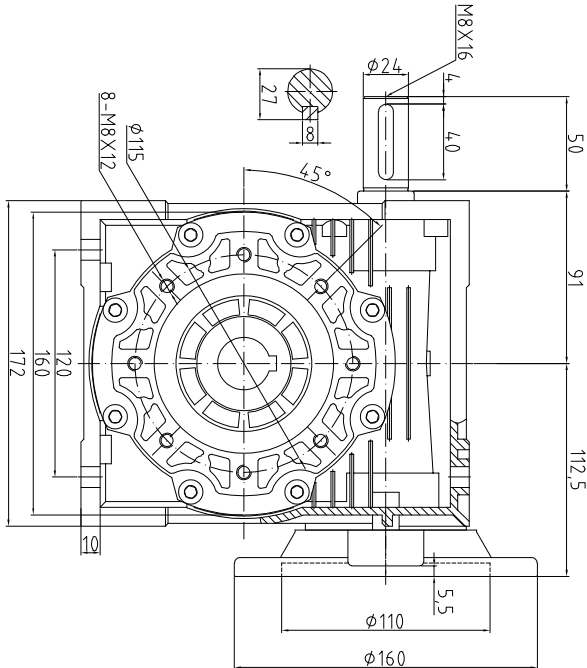

法兰面到蜗杆
孔底距离31

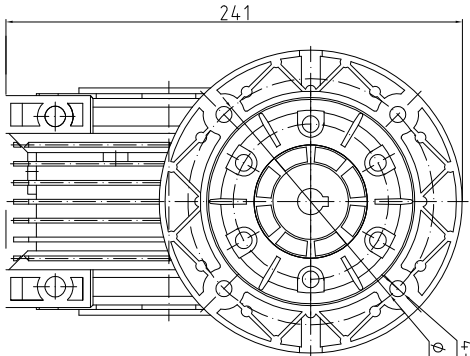

输出孔



减速比(i)	7.5	10	15	20	25	30	4.0	5.0	6.0	8.0	10.0	
额定输出扭矩(N·m)	190	200	200	210	200	230	220	200	200	190	180	
最大输出扭矩(N·m)	380	4.00	4.00	4.20	4.00	4.60	4.4.0	4.00	4.00	380	360	
额定输入转速	14.00 rpm	安装方向		油孔视图				安装方向		油孔视图		
最大输入转速	3000 rpm	B3						B8				
使用温度	-5℃~+40℃	B6						B7				
润滑方式	油润滑	V5						V6				
重量	≈9Kg	请注意： 1.所有数据(PDF、CAD、3D)变更时，我们不做通知。 2.其他参数请参考我司样本手册。										
												广东川铭精工科技 有限公司
												NMRV 蜗轮蜗杆减速机
												RV-E075