
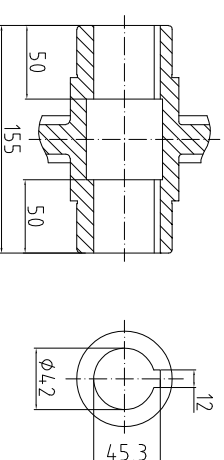
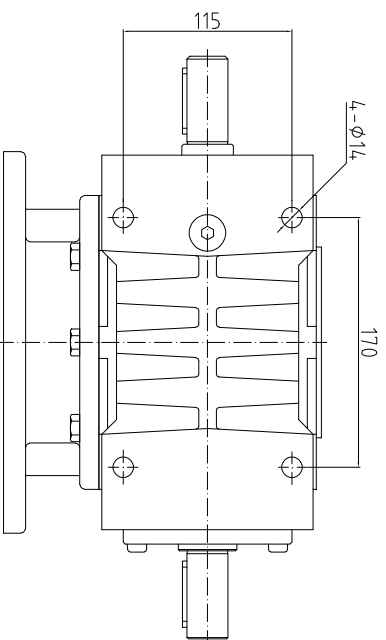
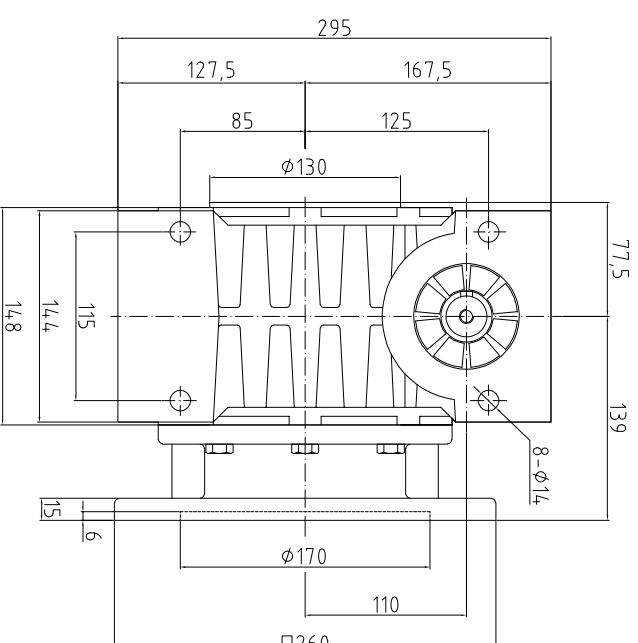


NRV-E110-(i)-F-B3

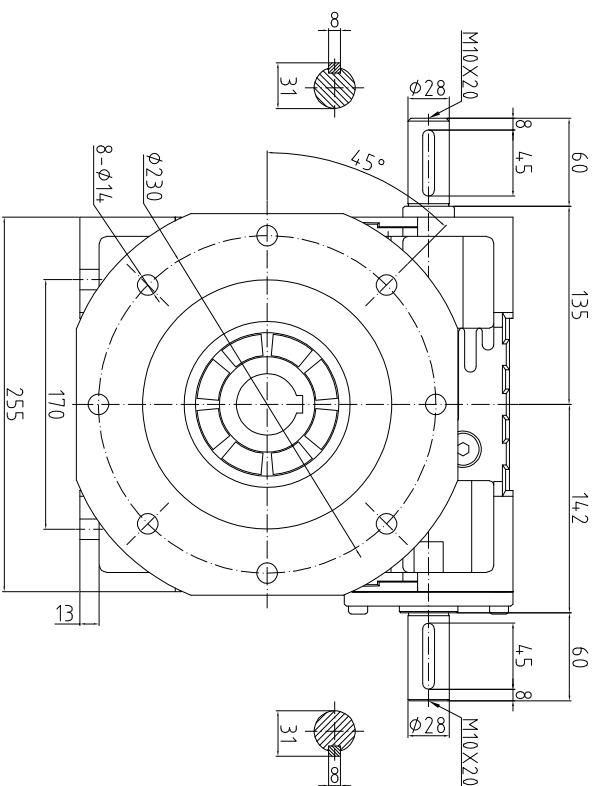

減速比(i)	7.5	10	15	20	25	30	40	50	60	80	100
額定輸出扭矩(Nm)	550	600	680	650	680	720	700	700	650	520	500
最大輸出扭矩(Nm)	1100	1200	1360	1300	1360	1440	1400	1400	1300	1040	1000

广东川铭精工科技 有限公司										CHESTNUT www.cmgmotor.com 视图方式 重量 比例											
NMRV蜗轮蜗杆减速机										请注意: 1.所有数据(PDF,CAD,3D)变更时,我们不做通知。 2.其他参数请参考我司样本手册。											
										安装方向		油孔视图		安装方向		油孔视图		工艺		批准	
										B3				B8							
										B6				B7							
										V5				V6				校对			
重量										≈4.7.7Kg											
润滑方式										油润滑											
使用温度										-5℃~+4.0℃											
最大输入转速										3000 rpm											
额定输入转速										14.00 rpm											