
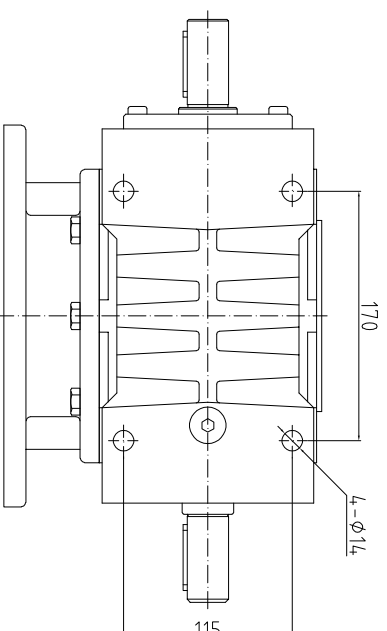
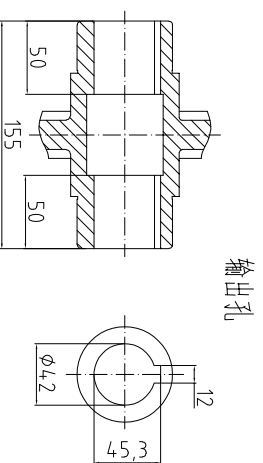
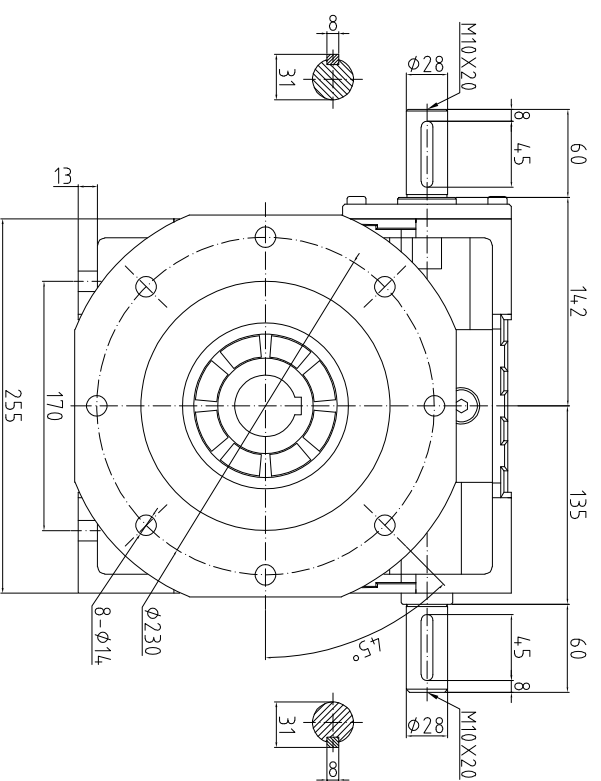
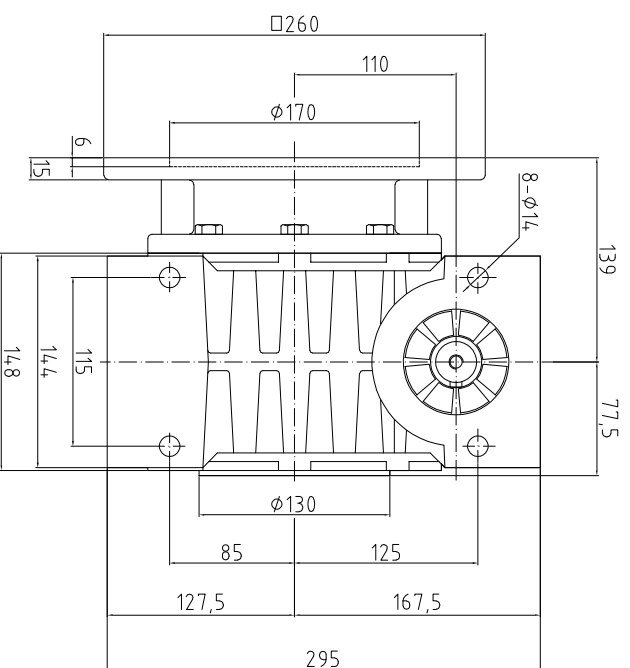


NRV-E110-(i)-F2-B3



减速机(i)	7.5	10	15	20	25	30	40	50	60	80	100
额定输出扭矩(N·m)	550	600	680	650	680	720	700	700	650	520	500
最大输出扭矩(N·m)	1100	1200	1360	1300	1360	1440	1400	1400	1300	1040	1000

广东川铭精工科技 有限公司									
额定输入转速		1400 rpm		油孔视图		油孔视图			
最大输入转速		3000 rpm		B3		B8			
使用温度		-5℃~+4.0℃		B6		B7			
润滑方式		油润滑		V5		V6			
重量		≈4.7.7Kg		安装方向		安装方向		工艺	
请注意：1.所有数据(PDF、CAD、3D)变更时，我们不做通知。 2.其他参数请参考我司样本手册。									
 CME MOTOR www.cmgmotor.com									
视图方式 重量 比例		设计 校对 审核 批准							
共 张 第 张		设计 校对 审核 批准							
NRV-E110									
NMRV 蜗轮蜗杆减速机									