

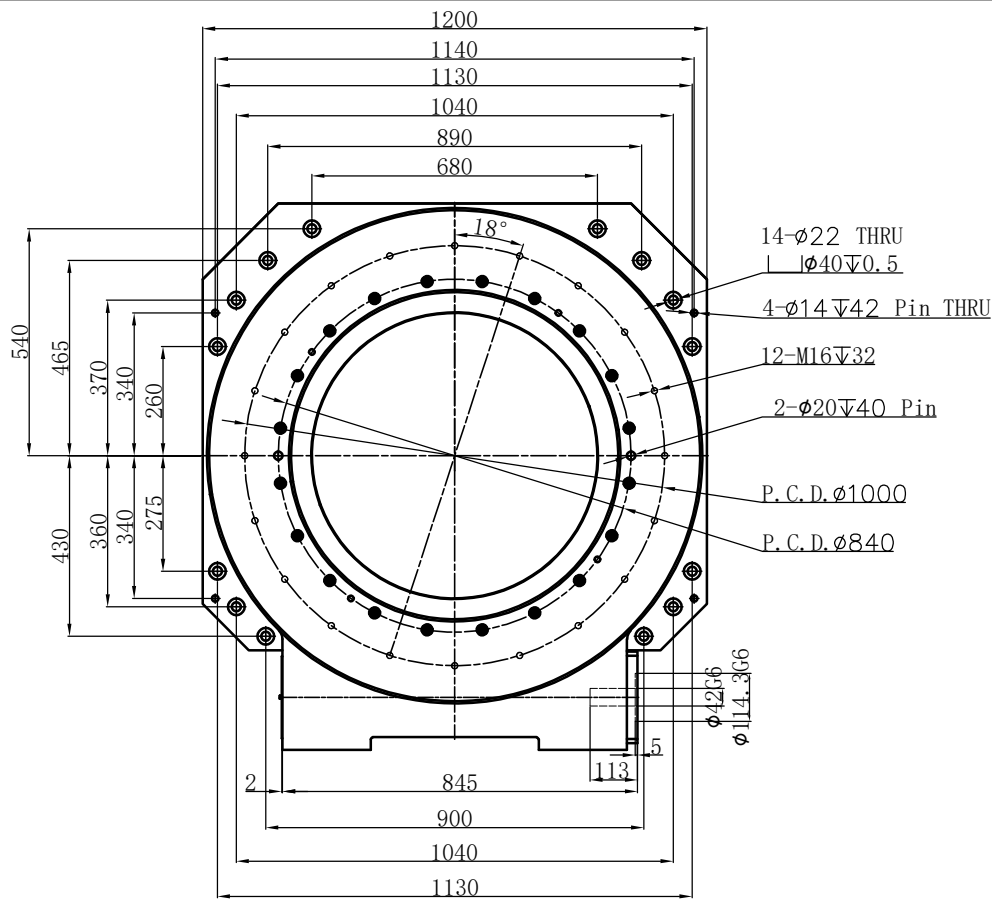
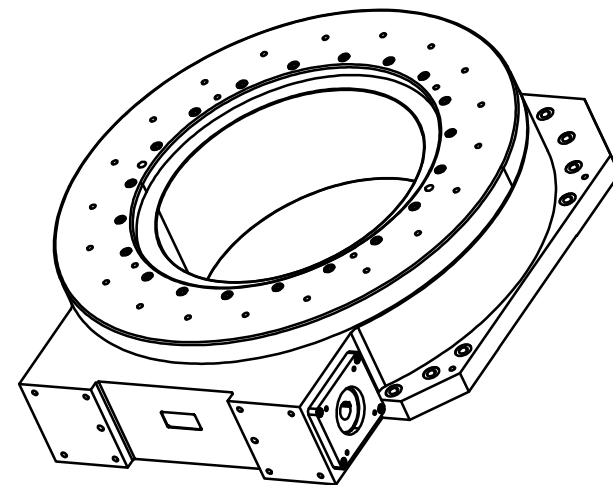


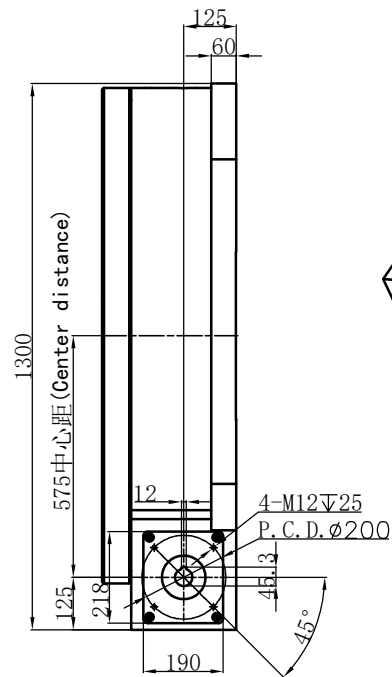


(Turn Table Diameter) 盘面 ϕ 1180

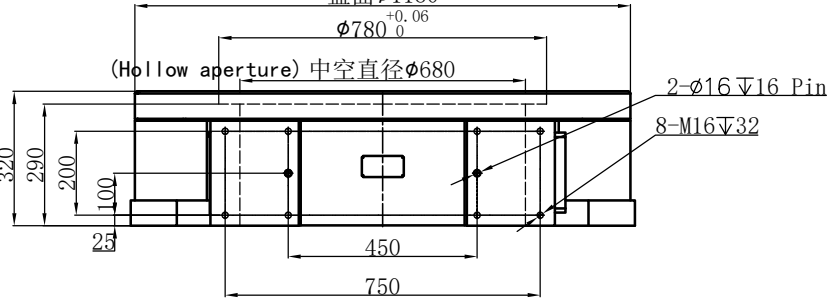

确认签字(盖章)回传

Please confirm the signature (seal) and return it.

☒ 勾选安装方式
Select the installation method

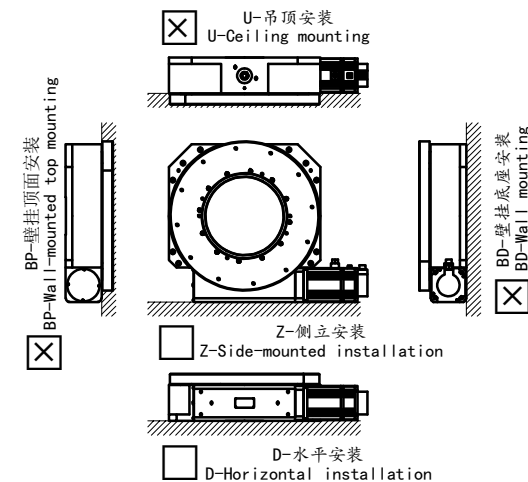

单平台减速比(i) Single-platform reduction ratio(i)	90	总转动惯量 Total moment of inertia (kg.m ²)	160.47																	
适配电机 Adaptation motor	伺服电机+行星	分度精度 Position accuracy (arcsec)	±20																	
适配伺服电机功率 (KW) Compatible servo motor power (KW)	5.5/7.5	重复精度 Repeatability (arcsec)	±5(0.0013°)																	
容许盘面转速 (r/min) Allowable disc speed (r/min)	<16	旋转台平行度 Turntable parallelism (mm)	±0.005																	
容许负载扭矩 (N.m) Allowable load torque (N.m)	58292	旋转台同心度 Turntable concentricity (mm)	±0.01	设计 device				标准化 standardization												
容许倾覆力矩 (N.m) Allowable overturning moment (N.m)	40804	使用寿命 Service Life (h)	20000	校对 proofread	W. Y. H	2025/05/13		版本 version	V1.0											
容许轴向载荷-动态 (N) Allowable axial load - dynamic (N)	197600	防护等级 Protection class	IP54	审核 Audit																
容许径向载荷-动态 (N) Allowable radial load - dynamic (N)	113002	产品重量 (不含润滑油) Weight (without oil)	1735kg	工艺 craft				批准 approve												

WWW. cmgmotor. com

视图方式
View mode

比例
proportion

1:18

广东川铭精工
科技有限公司
CHEEMING. ALL RIGHTS RESERVED

精密中空旋转分度台
Precision hollow rotary indexing table

TDU-575R-90
(42J12-114. 3-200-M12-113)